

Quattroflow™ QF30SU

Single-Use Pump for Low Flow Rates

Quattroflow has extended its Single-Use product line to the lower end. With a flow rate of 0.06 – 30 lph the QF30 has been developed for very low needed capacities.

The complete Quattroflow pump range covers a flow capacity between 0.06 and 16,000 lph with eight pump sizes now available — the right Quattroflow pump for all applications.

The QF30SU offers the following main features and benefits:

- Disposable pump chamber with tool-free installation
- Retrofittable on QF150 drives
- 500:1 turn-down ratio
- Linear flow performance
- 0.06 – 30 lph flow range, max. 4 bar (58 psi)
- Analog input, 0-5 VDC
- Available accessories: Power box, diaphragm sensor, PID pressure controller
- Typical applications include: Chromatography, TFF and virus filtration

QF30SU
Single-Use
Diaphragm Pump

Developed for Lower Flow Rates
in Single-Use Applications



Quattroflow develops and manufactures, in close cooperation with its customers, specific Diaphragm Pumps for critical applications in the pharmaceutical and biotech industries. The method of operation of Quattroflow pumps allows them to gently, safely and securely convey aqueous solutions and biological products that are sensitive to shear force. The design does not feature a mechanical shaft seal or wetted rotating parts, ensuring total product containment without abrasion. Additionally, the pumping principle enables risk-free dry-running, low pulsation, self priming, and minimal particle generation.

Quattroflow™ QF30SU

| | |
|---------------------------------------------------|-------------------|
| Flow Rate Maximum: | |
| Eccentric Shaft 3° | 30 lph (500 mlpm) |
| Flow Rate Minimum: | |
| Eccentric Shaft 3° | 0.06 lph (1 mlpm) |
| Pressure: | |
| Temperature of Fluid < 40° C (104° F) | 4 bar (58 psi) |
| Temperature of Fluid > 40° C (104° F) | 4 bar (58 psi) |
| Maximum Temperature: | |
| Fluid | 60°C (140°F) |
| Pump Speed Range: | |
| rpm | 1 - 1,000 |
| Suction Lift Dry: | |
| Eccentric Shaft 3° | 1 m (3.28.ft) |
| Volume Specifications: | |
| Approximated Volume per Revolution at Free Output | 0.55 ml |
| Approximated Filling Volume Without Connectors | 9.65 ml |
| Connection Specification (Standard): | |
| Connectors | Hosebarb 4 mm |
| Position of Connectors | Front |


| | |
|---------------------------------------------|------|
| Product Wetted Materials (Standard): | |
| Pump Chamber | PP |
| Valve Plate | PP |
| Diaphragms | TPE |
| Valves | EPDM |
| O-rings | EPDM |

| | |
|----------------------------------------|--------------------------------------------------|
| Certificates/Proofs (Optional): | |
| Elastomer (product wetted) | USP <88> Cl. VI; FDA21CFR177; BSE/TSE Safe |

| | |
|---------------|--------------------|
| Motor: | |
| Type | Brushless |
| Voltage | 230V (110V option) |
| Power | 90 W |

| | |
|-----------------------------------------------|-----------------|
| Pump Dimension with Motor and Housing: | |
| Length | 275 mm (10.83") |
| Width | 164 mm (6.46") |
| Height | 185 mm (7.28") |

| | |
|--------------------------------------------|--------------|
| Pump Weight with Motor and Housing: | |
| | 9 kg (20 lb) |

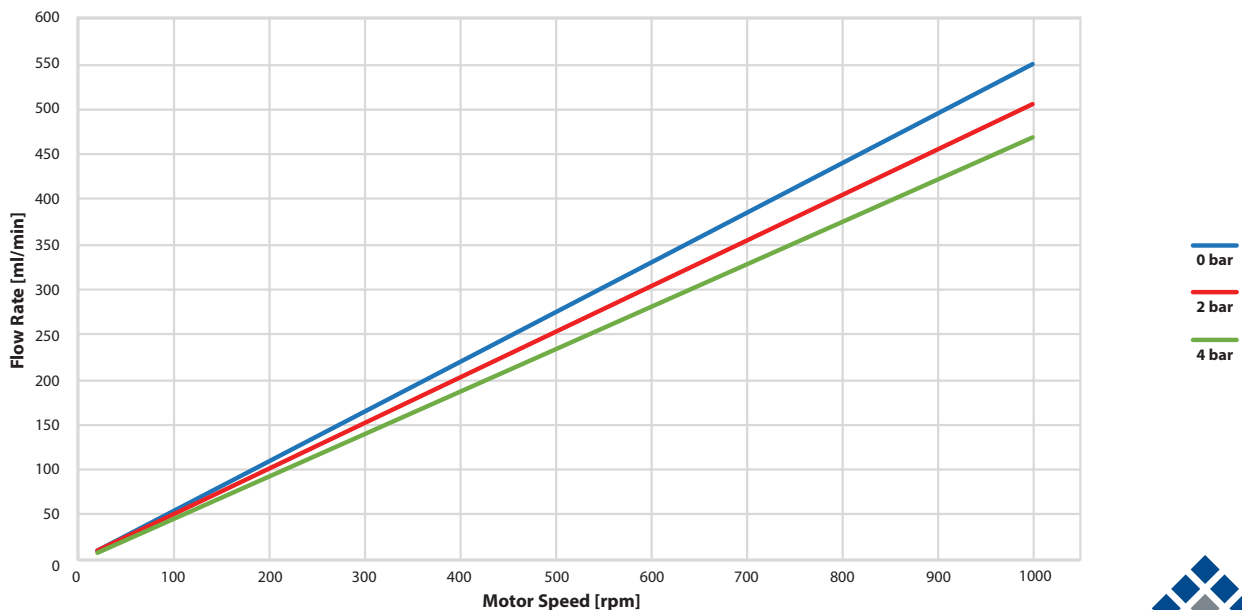

ALMATEC Maschinenbau GmbH
 Hochstraße 150-152
 47228 Duisburg, Germany
 Tel: +49 (2065) 89205-0 • Fax: +49 (2065) 89205-40
 info@almatec.de
 quattroflow.com

Almatec reserves the right to modify the information and illustrations contained in this document without prior notice. This is a non-contractual document. 03-2019.

Authorized PSG® Partner: